

RECOLUX

TRACK PANEL

LED LINEAR TRACK LIGHT



 +86-0755-8217-6296


 www.recolux.com

 103, Block 4, No. 7 Xinrong Road,
Xiuxin Community, Kengzi, Pingshan,
Shenzhen, PRC


 info@recolux.com

Features


Universal track adapter
Power switchable
Tridonic driver
Innovative optics
Up to 175 LM/W
Optional beam angle
Flicker- free

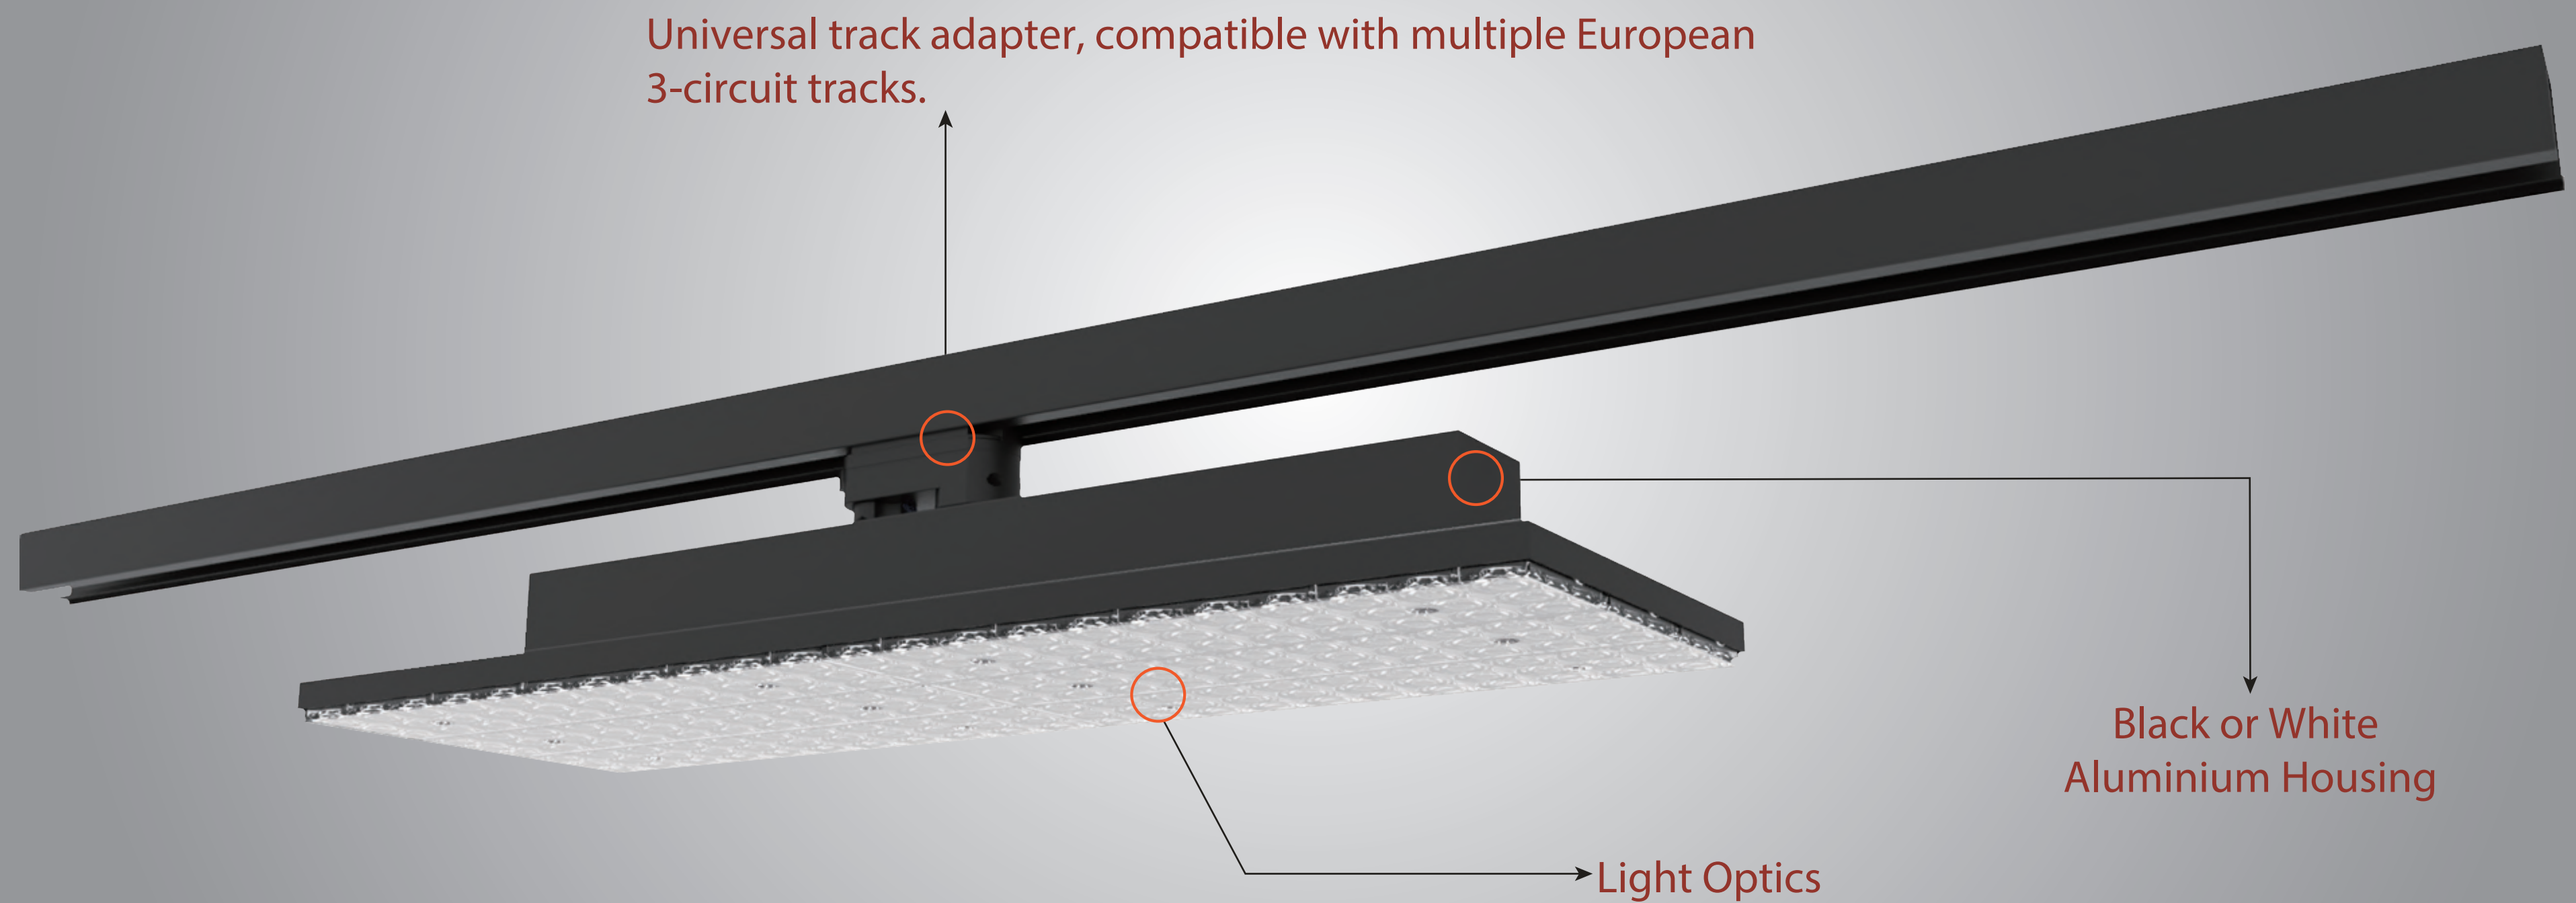

Features

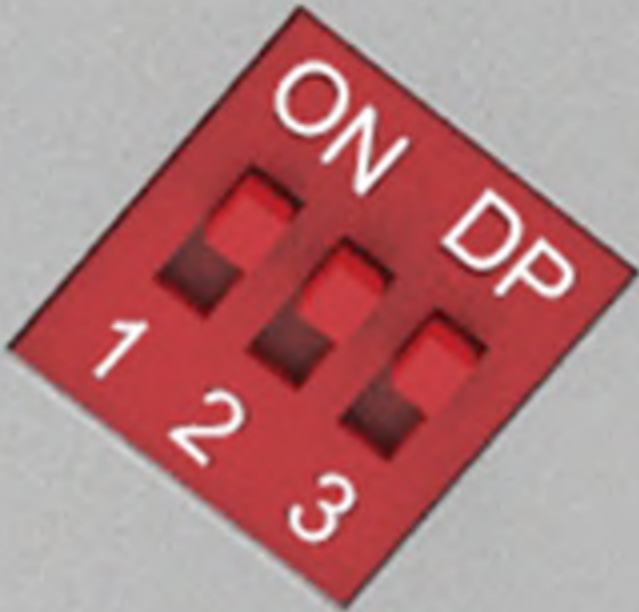


Brightness Adjustable

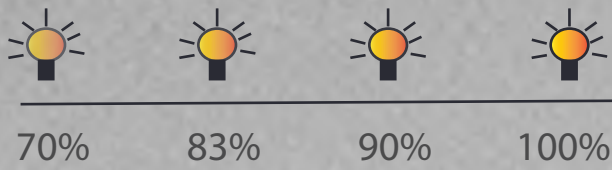

1	2	3	Power(W)
-	-	-	70
ON	-	-	64
ON	ON	-	57
ON	ON	ON	50

Fresh Lighting

Accentuating freshness and overall visual appeal, making food appealing

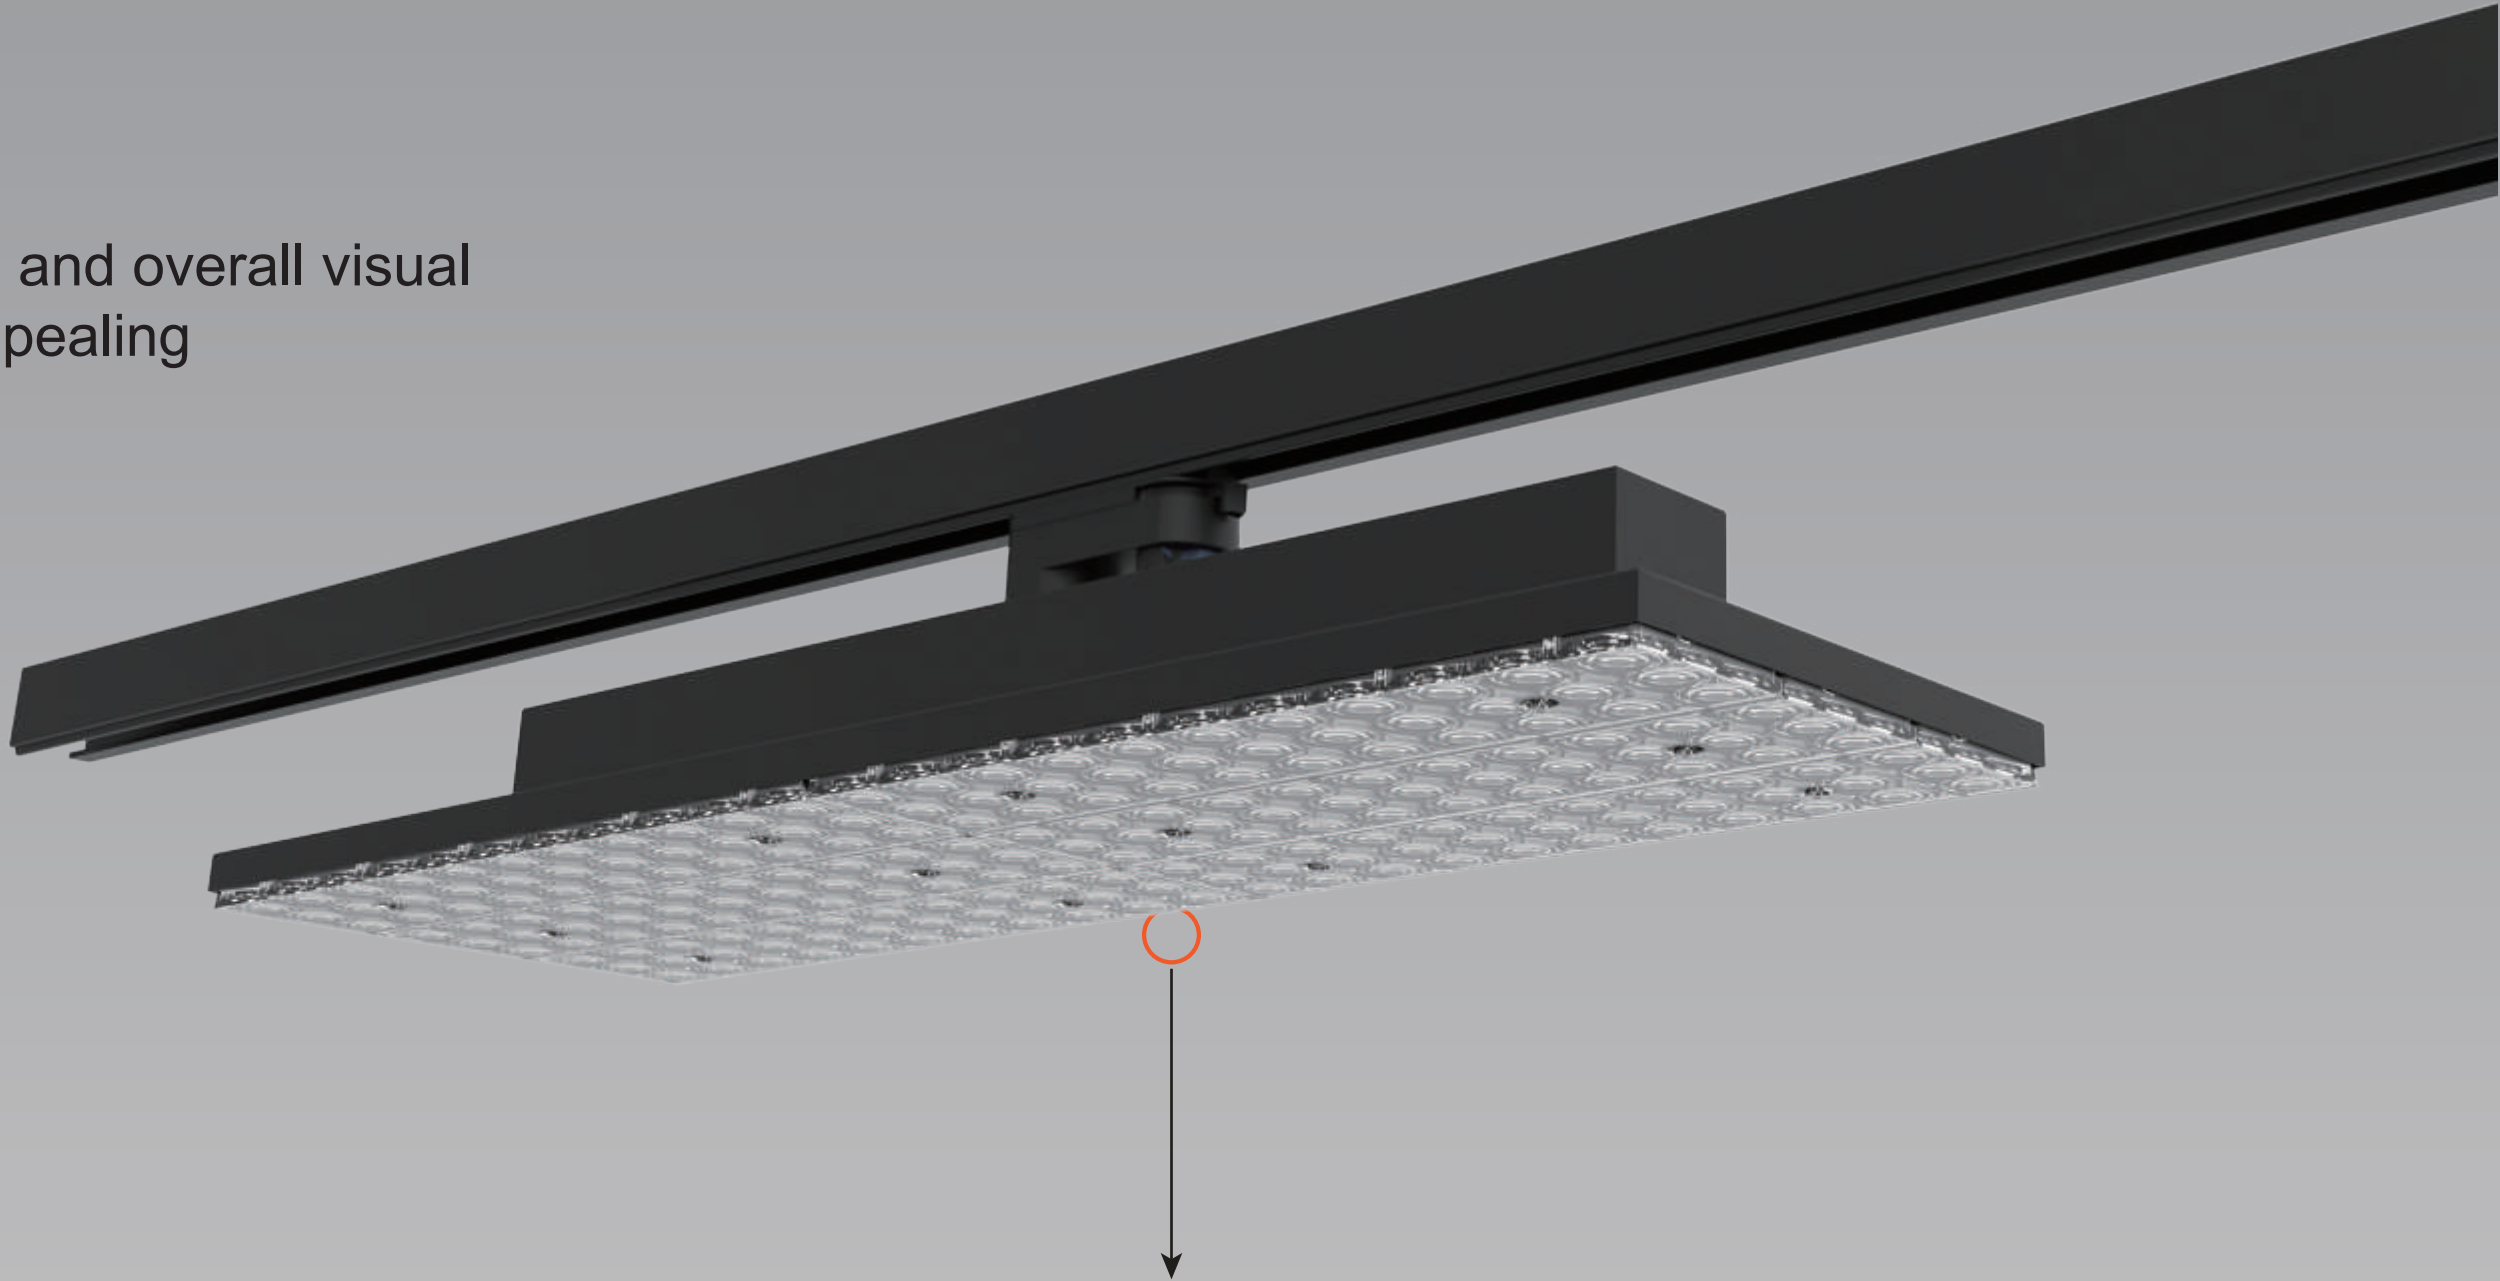

Marbled Meat



Red Meat



Bread



Fish



fruits and vegetables




Features


350° Flexible
Black or White



Light Distribution



90 °




60 °




DS 25 °




DS 25 ° x 90 ° x DS 25 °




DS 25 ° x 60 ° x DS 25 °

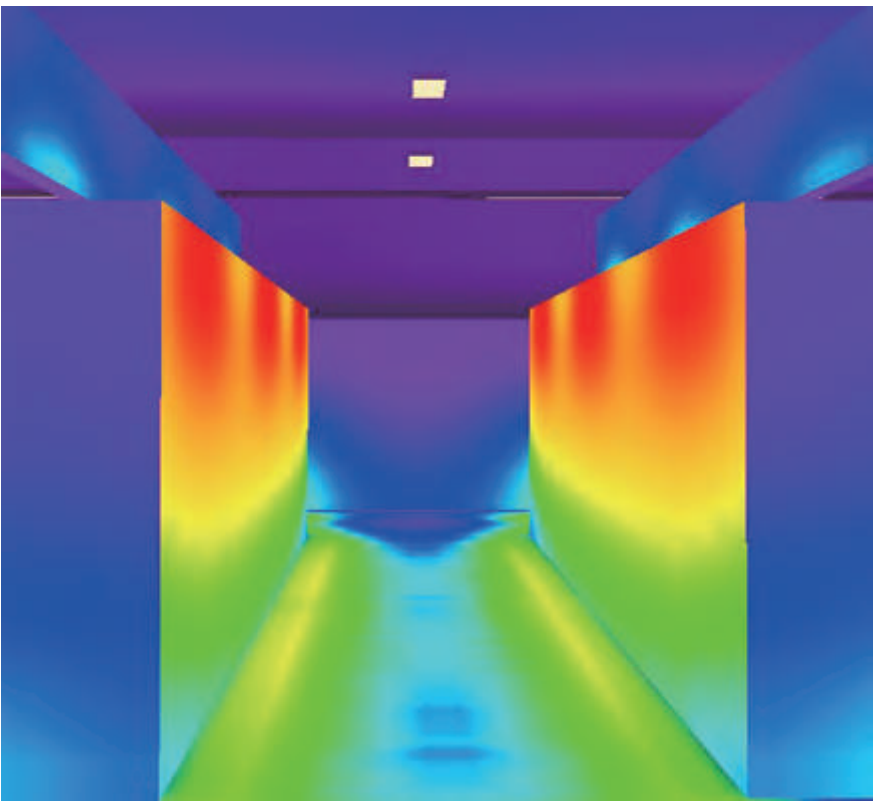


DS25°

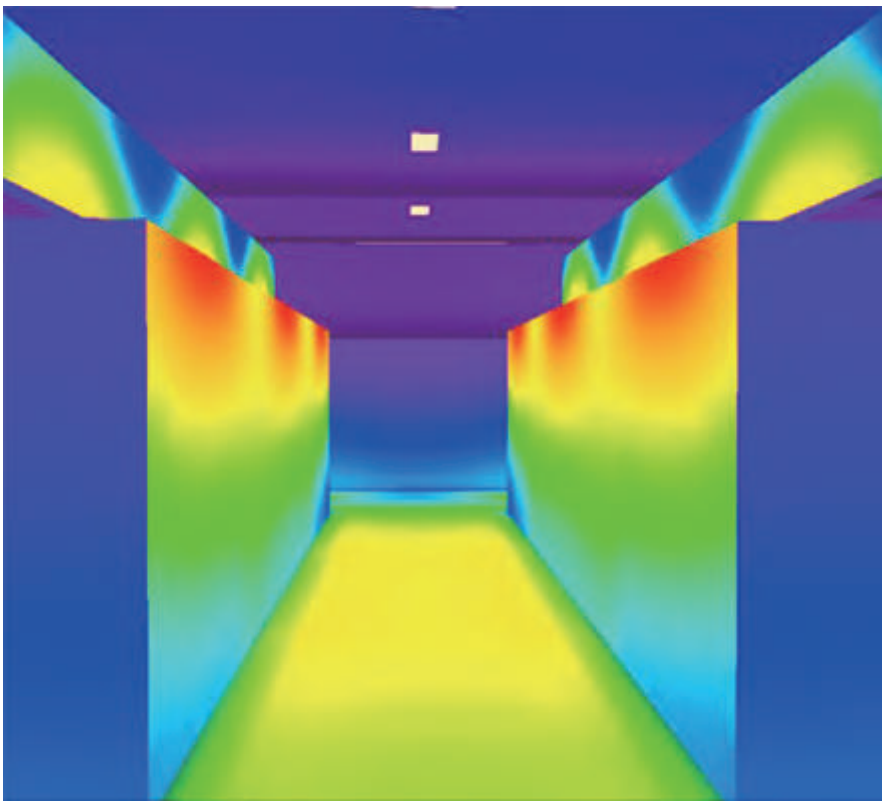


DS25° x 90° x DS25°

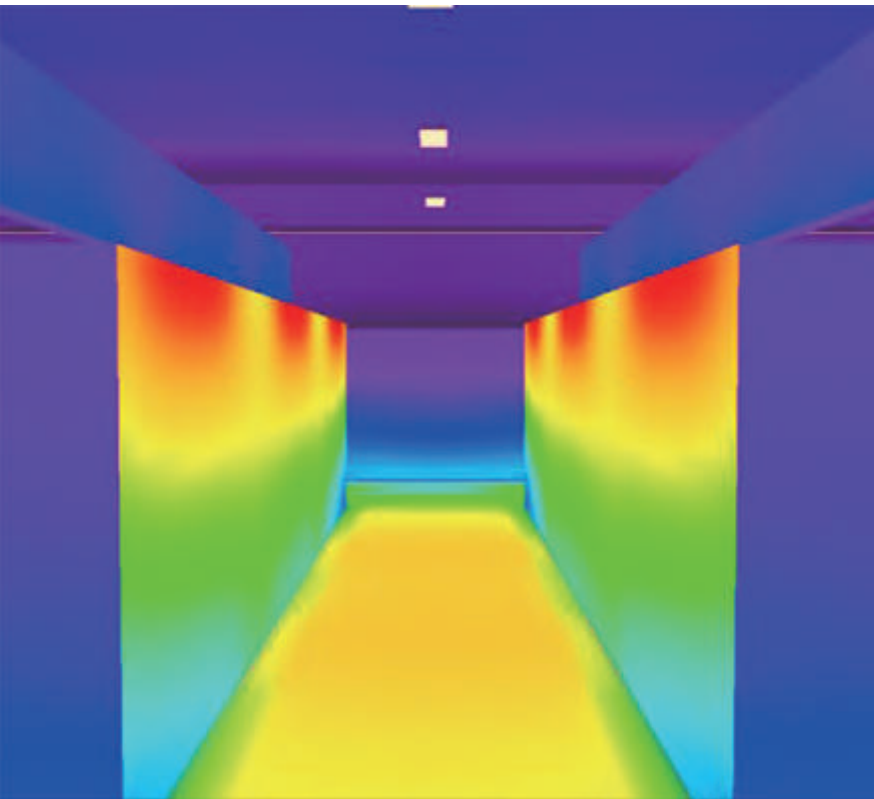

90° (WD)

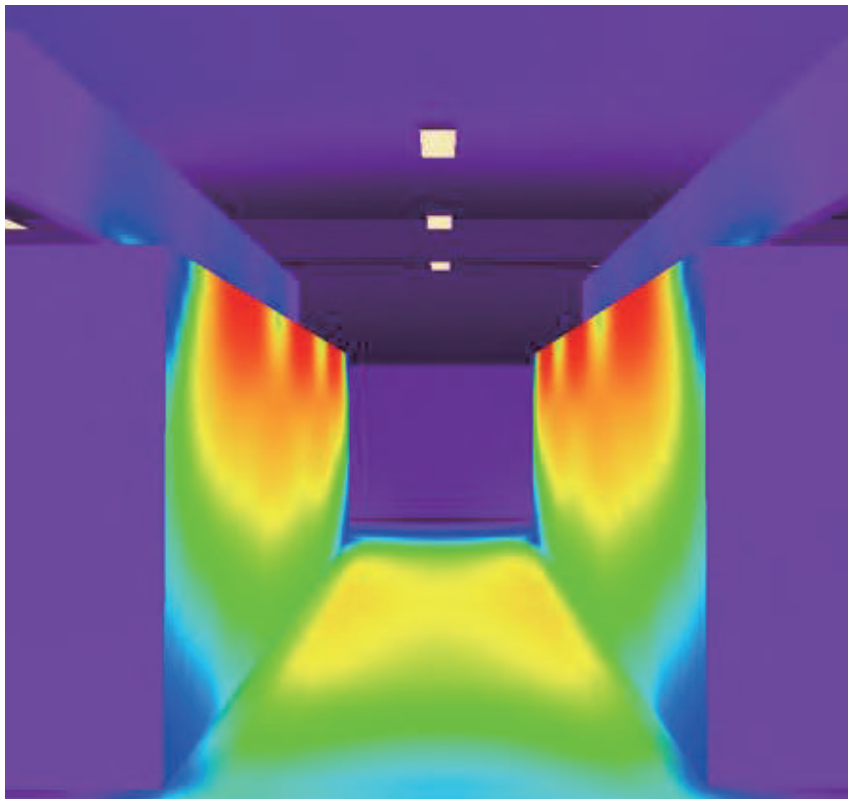

60° (NR)

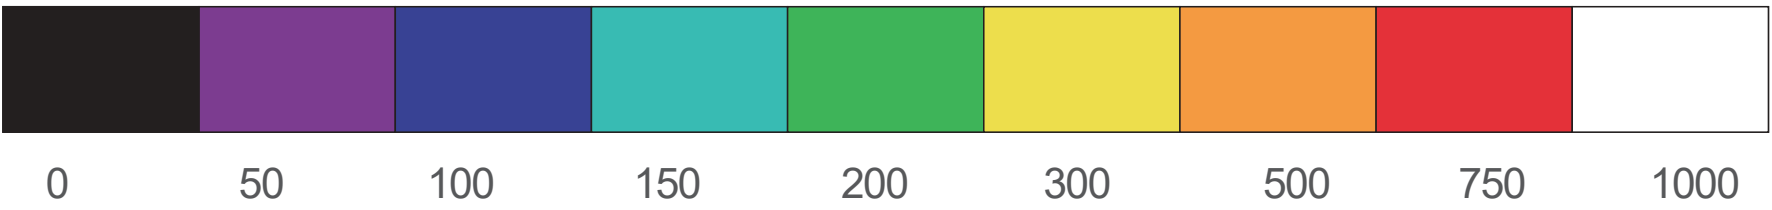


Shop
Supermarket







Dimensions	578 x 189 x 77 mm
Weight	2.92 kg
Input voltage	220 - 240V AC/DC
Lifetime	>50.000 h [L80, B10]
Energy efficiency class	A++
Power factor	> 0,95
Switching cycles before failure	> 500.000
Operating temperature	-25° bis +45° C
Storing temperature	-30° bis +60° C
SCDM	<3
Material	Aluminium+ PMMA
Track Adaptor	Powergear 3-Circuit

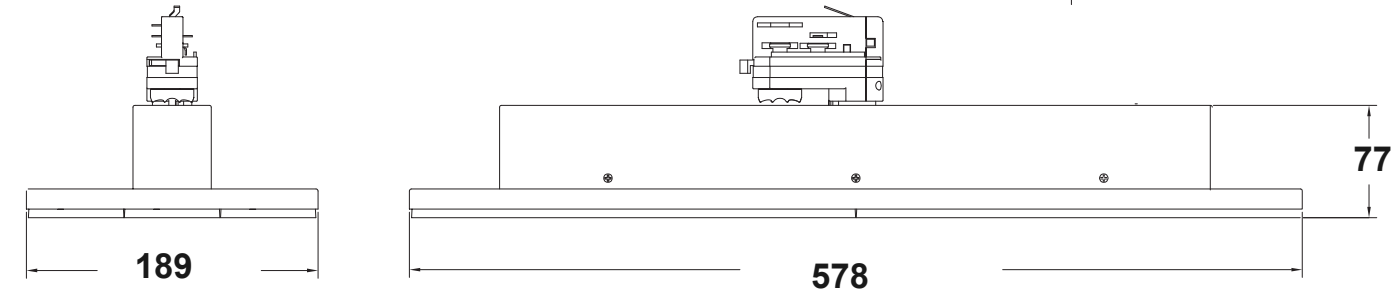

Datasheet	TYPE	POWER (W)	LUMEN (LM)	EFFICACY (LM/W)	CCT K	Beam angle °	CRI RA	Driver (Brand)	Function /	MCB 16A type B /
Shape Color	P012H1-70W2-BC	70W adjust 60W 50W 40W by switch	Max 11,200	160	3000K		>80 or >90	BOKE	Non-Dimmable	22 pcs
	P012H1-70N1/P1/C1-BC	70W adjust 60W 50W 40W by switch	Max 12,200	175	4000K 5000K 6000K	90° 60°	>80 or >90	BOKE	Non-Dimmable	22 pcs
	P012H1-70RM/MM-BC	70W adjust 60W 50W 40W by switch	Max 5,200	75	Red Meat Marbled Meat	DS25° DS25° x 60° x 25°	>80	BOKE	Non-Dimmable	22 pcs
	P012H1-70PR-BC	70W adjust 60W 50W 40W by switch	Max 7,000	100	fruits and vegetables	DS25° x 90° x 25° 90° x 60° x 90°	>90	BOKE	Non-Dimmable	22 pcs
	P012H1-70FS/BR-BC	70W adjust 60W 50W 40W by switch	Max 8,000	115	Fish Bread		>90	BOKE	Non-Dimmable	22pcs
White RAL 9016										
Black	P012S1-70W2-P4	MAX 70W	Max 11,200	160	3000K		>80 or >90	Philips	DALI	21 pcs
	P012S1-70N1/P1/C1-P4	MAX 70W	Max 12,200	175	4000K 5000K 6000K	90° 60°	>80 or >90	Philips	DALI	21 pcs
	P012S1-70RM/MM-P4	MAX 70W	Max 5,200	75	Red Meat Marbled Meat	DS25° DS25° x 60° x 25°	>80	Philips	DALI	21 pcs
	P012S1-70PR-P4	MAX 70W	Max 7,000	100	fruits and vegetables	DS25° x 90° x 25° 90° x 60° x 90°	>90	Philips	DALI	21 pcs
	P012S1-70FS/BR-P4	MAX 70W	Max 8,000	115	Fish Bread		>90	Philips	DALI	21pcs

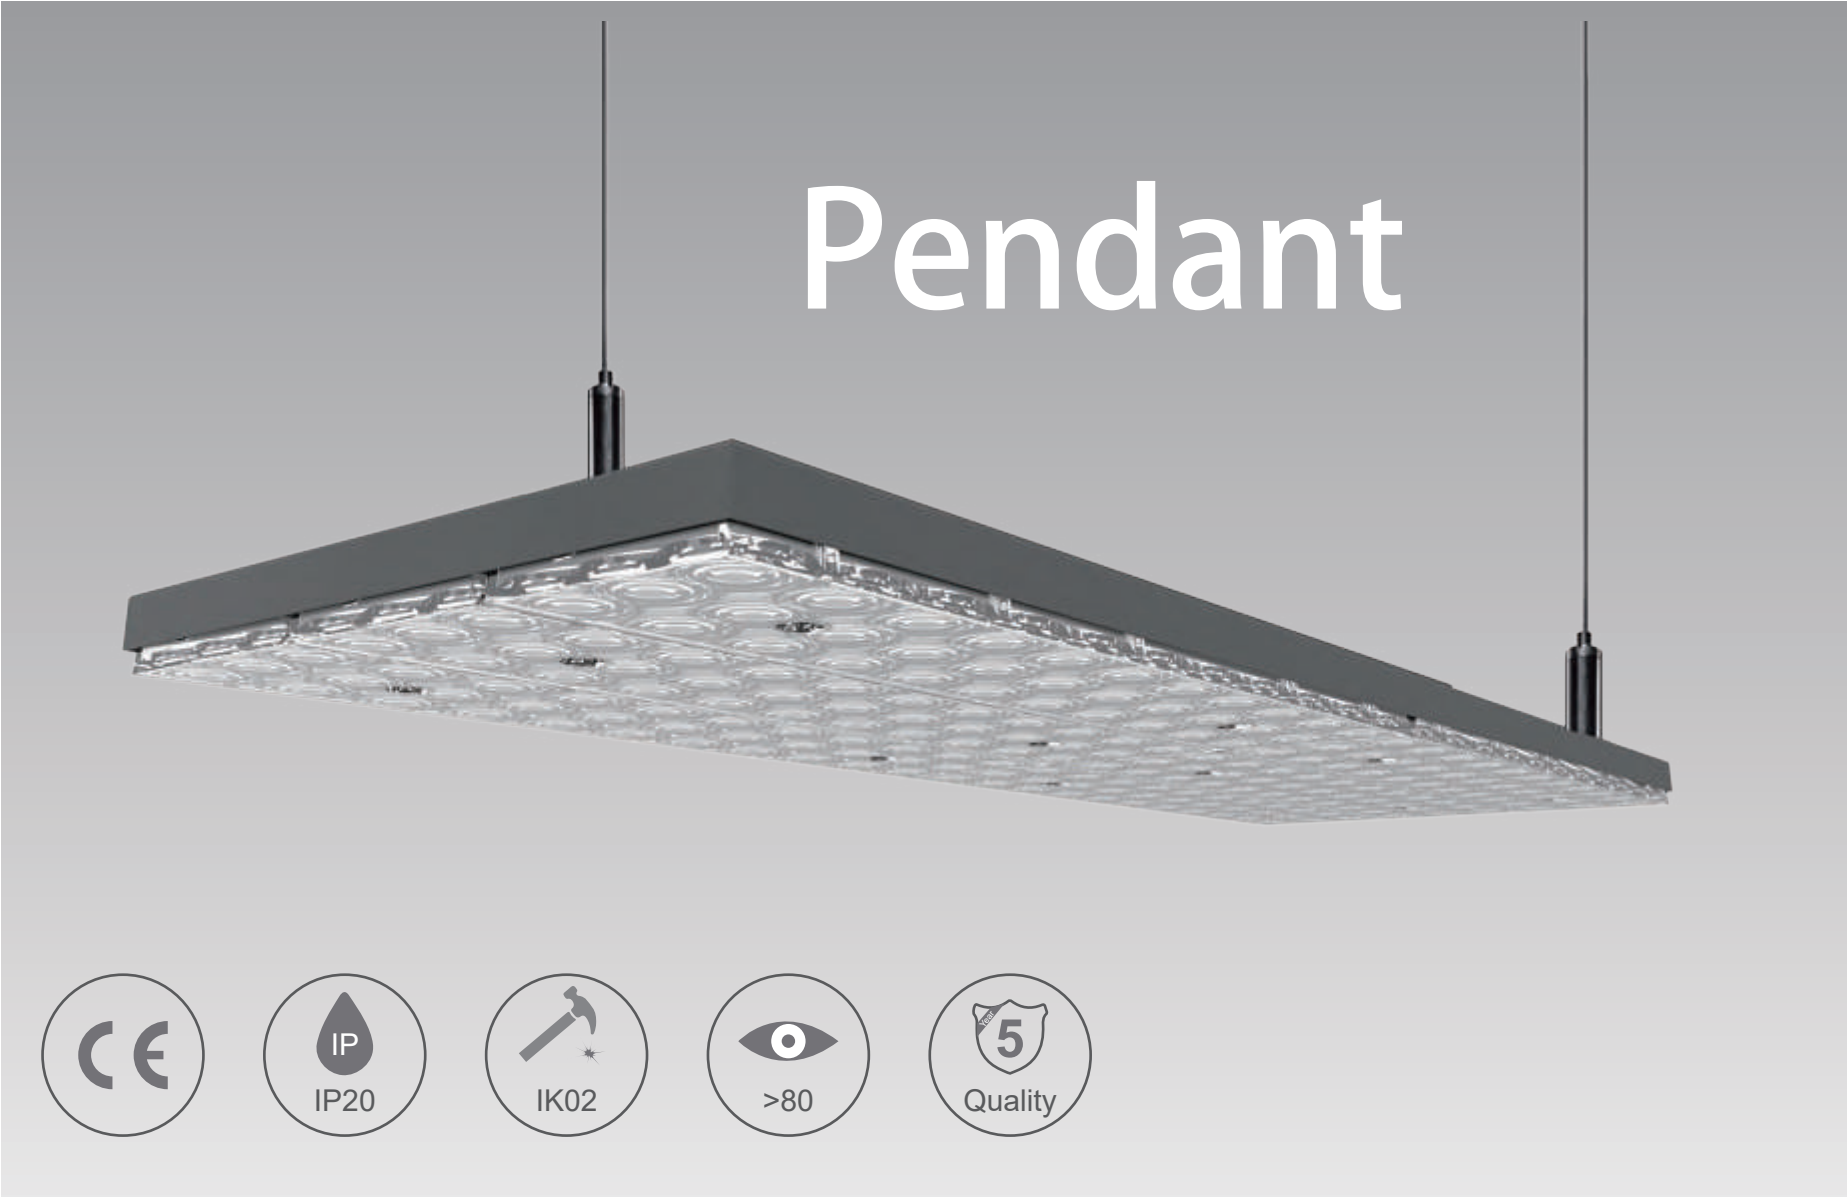


Dimensions	578 x 189 x 157 mm
Weight	2.92 kg
Input voltage	220 - 240V AC/DC
Lifetime	>50.000 h [L80, B10]
Energy Efficiency Class	A++
Power factor	> 0,95
Switching cycles before failure	> 500.000
Operating temperature	-25° bis +45° C
Storing temperature	-30° bis +60° C
SCDM	<3
Material	Aluminium+ PMMA
Track Adaptor	Powergear 3-Circuit

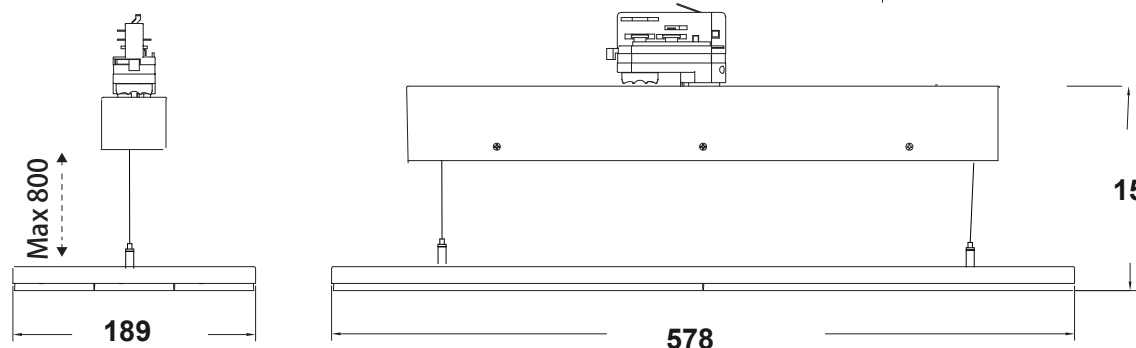

Datasheet	TYPE	POWER (W)	LUMEN (LM) 	EFFICACY (LM/W)	CCT K	Beam angle ° 	CRI RA	Driver (Brand)	Function /	MCB 16A type B /
Shape Color	P012H3-70W2-BC	70W adjust 60W 50W 40W by switch	Max 11,200	160	3000K	90° 60° DS25° DS25° x 60° x 25° DS25° x 90° x 25° 90° x 60° x 90°	>80 or >90	BOKE	Non-Dimmable	22 pcs
	P012H3-70N1/P1/C1-BC	70W adjust 60W 50W 40W by switch	Max 12,200	175	4000K 5000K 6000K		>80 or >90	BOKE	Non-Dimmable	22 pcs
	P012H3-70RM/MM-BC	70W adjust 60W 50W 40W by switch	Max 5,200	75	Red Meat Marbled Meat		>80	BOKE	Non-Dimmable	22 pcs
	P012H3-70PR-BC	70W adjust 60W 50W 40W by switch	Max 7,000	100	fruits and vegetables		>90	BOKE	Non-Dimmable	22 pcs
	P012H3-70FS/BR-BC	70W adjust 60W 50W 40W by switch	Max 8,000	115	Fish Bread		>90	BOKE	Non-Dimmable	22pcs
Black	P012H3-70W2-P4	MAX 70W	Max 11,200	160	3000K		>80 or >90	Philips	DALI	21 pcs
	P012H3-70N1/P1/C1-P4	MAX 70W	Max 12,200	175	4000K 5000K 6000K	90° 60°	>80 or >90	Philips	DALI	21 pcs
	P012H3-70RM/MM-P4	MAX 70W	Max 5,200	75	Red Meat Marbled Meat	DS25° DS25° x 60° x 25°	>80	Philips	DALI	21 pcs
	P012H3-70PR-P4	MAX 70W	Max 7,000	100	fruits and vegetables	DS25° x 90° x 25° 90° x 60° x 90°	>90	Philips	DALI	21 pcs
	P012H3-70FS/BR-P4	MAX 70W	Max 8,000	115	Fish Bread		>90	Philips	DALI	21pcs



Recessed

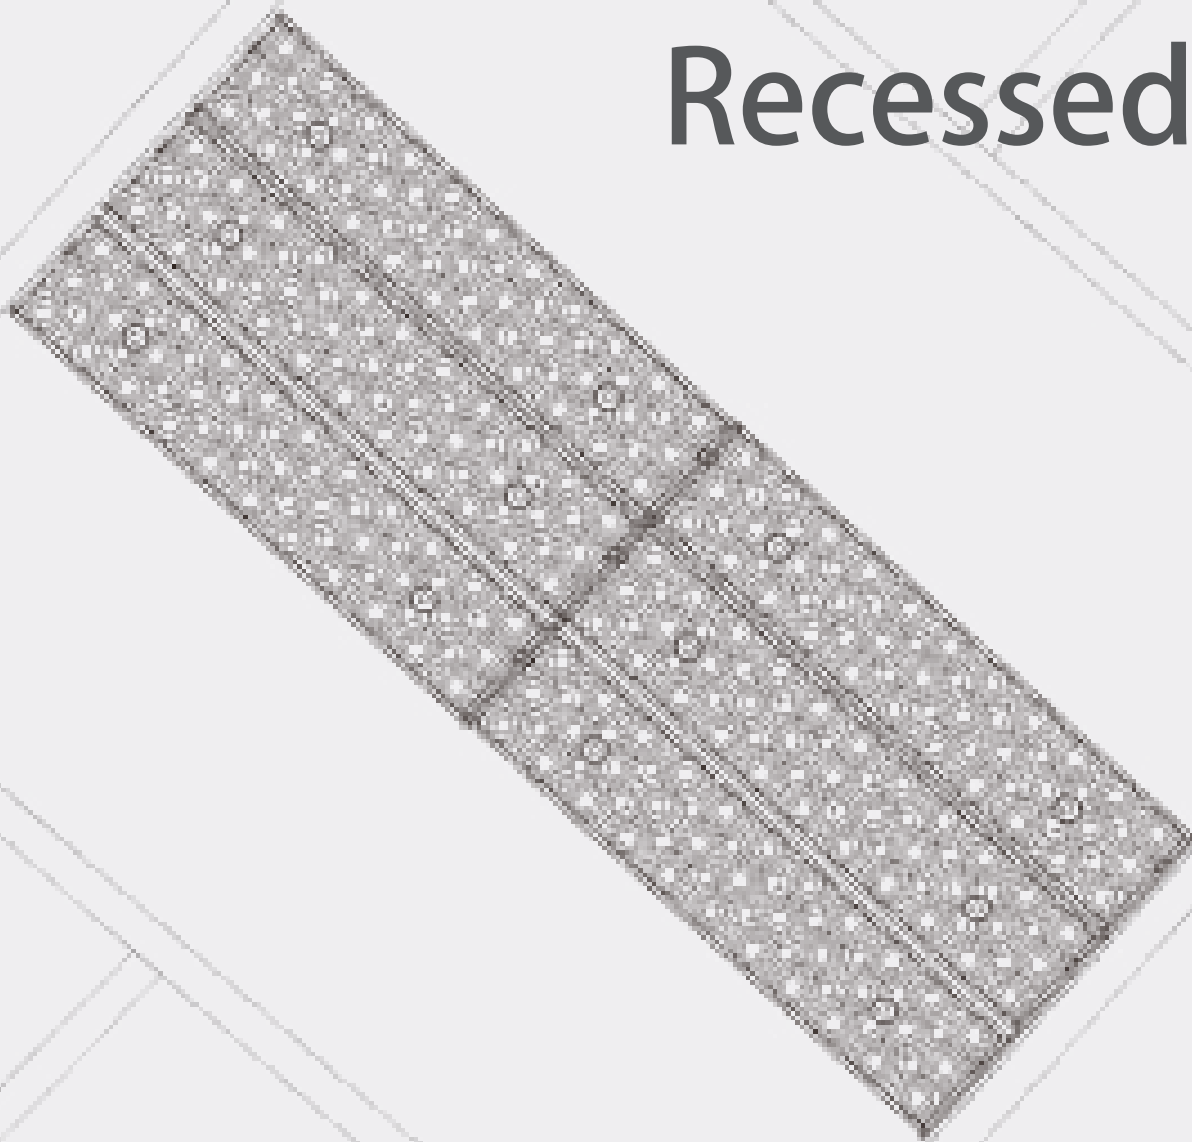

Dimensions	578 x 189 x 77mm
Weight	2.92 kg
Input voltage	220 - 240V AC/DC
Lifetime	>50.000 h [L80, B10]
Energy efficiency class	A++
Power factor	> 0,95
Switching cycles before failure	> 500.000
Operating temperature	-25° bis +45° C
Storing temperature	-30° bis +60° C
SCDM	<3
Material	Aluminium+ PMMA
Connector	GST plug 18/3 / GST plug 18/5


Technicak/Electrical Characters

Item	Model NO.	Watt		Luminous Efficacy		EEC
1	P012H3-70DS	70W/60W/50W/40W	MAX 12,200	175 LM/W	DS25°	A++
2	P012H3-70NR	70W/60W/50W/40W	MAX 12,200	175 LM/W	60°	A++
3	P012H3-70WD	70W/60W/50W/40W	MAX 12,200	175 LM/W	90°	A++
4	P012H3-7001	70W/60W/50W/40W	MAX 12,200	175 LM/	DS25° x 60° x 25°	A++
5	P012H3-7003	70W/60W/50W/40W	MAX 12,200	175 LM/	DS25° x 90° x 25°	A++
6	P012H3-7004	70W/60W/50W/40W	MAX 12,200	175 LM/	90° x 60° x 90°	A++

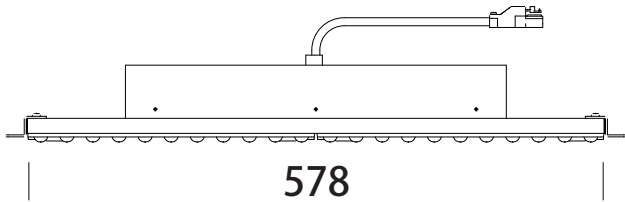

ACCESSORIES

With visible supporting profile, 2 x mounting brackets,

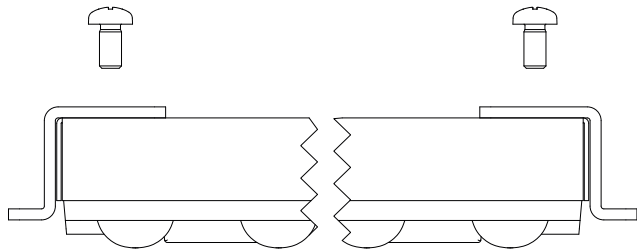


625 MM

RE-P01-00	White
RE-P01-01	Black

600 MM


RE-P01-02	White
RE-P01-03	Black

Installation

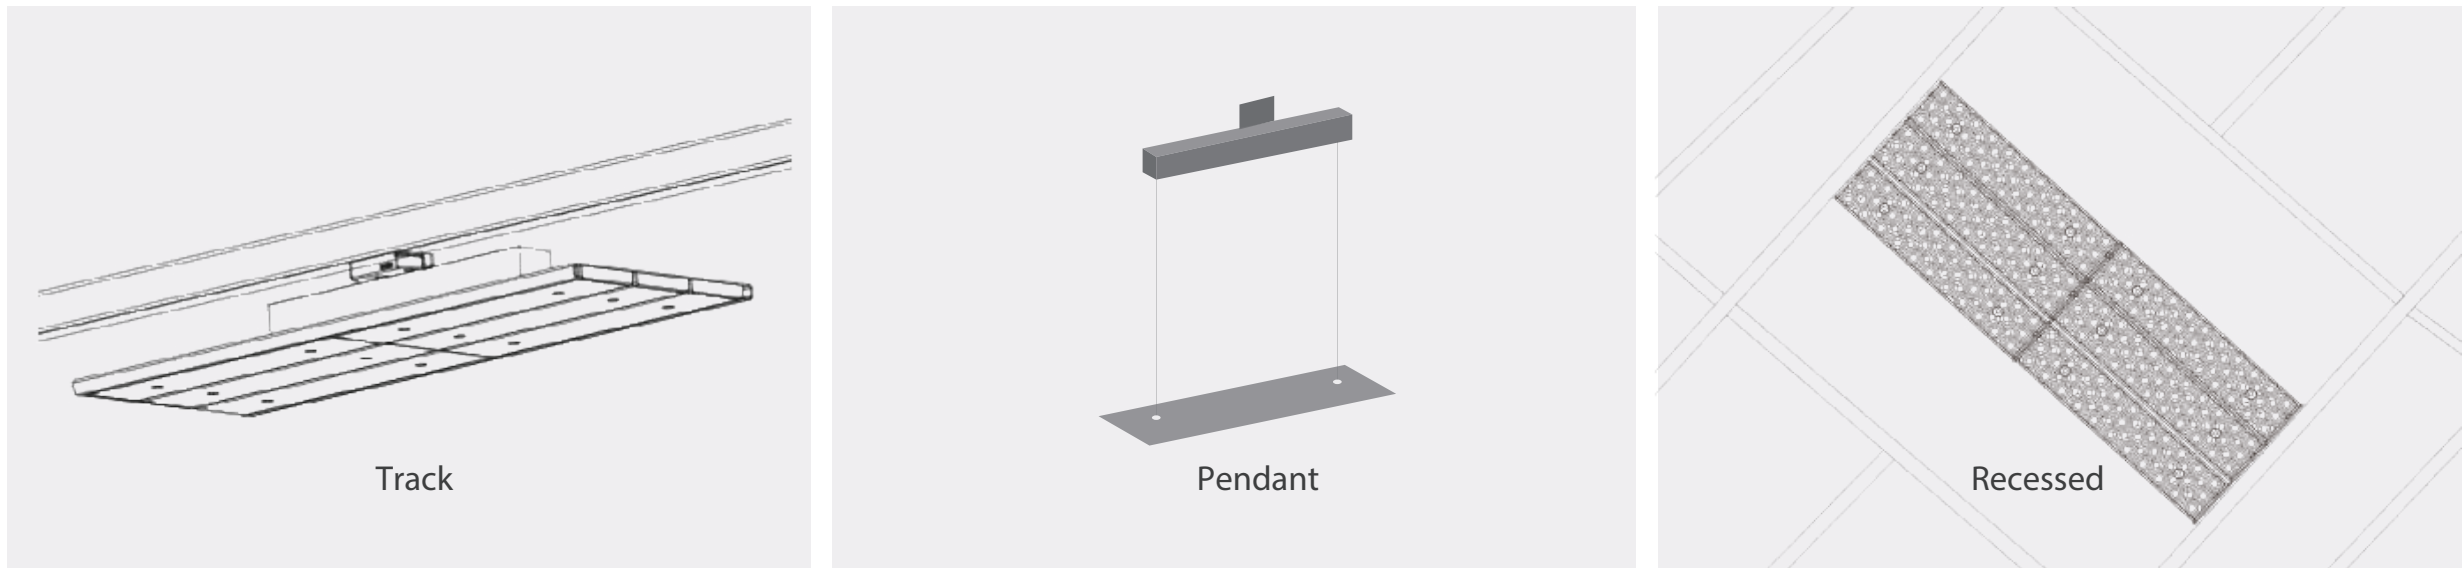

● Package

Code	Outer Carton	Qty/Carton	Unit N.W	G.W/Carton
P01	620x 360 x 190mm	2Pcs	5.8kg	6.5Kg

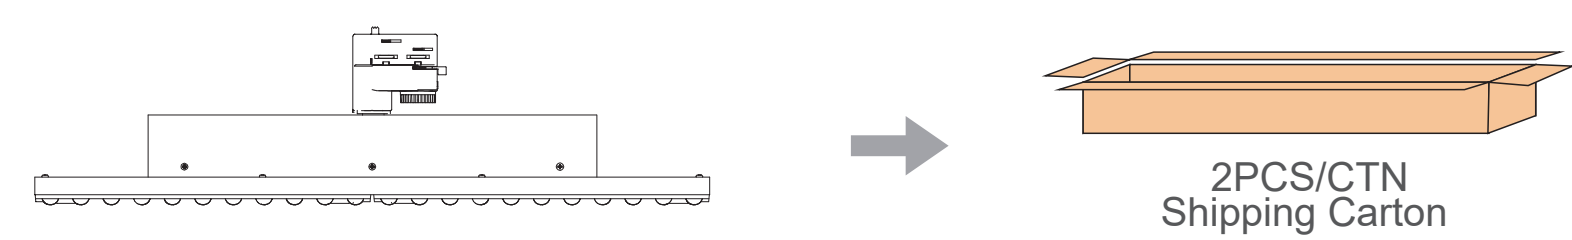

! Caution

- ※ In case of electric shock, please make sure the power is off before installation.
- ※ The lamp should be installed and operated by a qualified electrician or technician in accordance with relevant local codes.
- ※ Do not use sharp tools near or on the surface of the lamp.
- ※ Unpack and examine the product carefully. Report any damage and save all packing materials if any portion of the product was damaged during transportation.